



P-DUKE POWER


QAE60U Series

QUARTER-BRICK DC-DC Converter
Up to 60 Watts

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

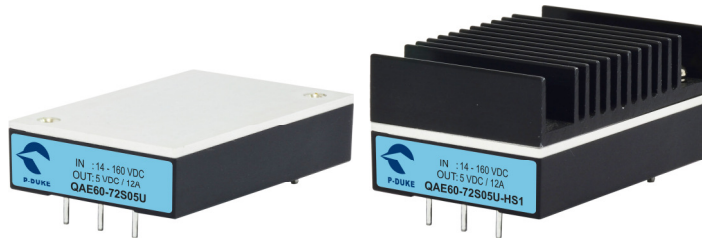

Railway



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



3000 VAC
Reinforced Insulation

2250 VDC
Basic Insulation

12:1
Ultra-Wide Input Range

NO
Min. Load Required

LOW
Standby Power

REMOTE ON OFF

OCP

OTP

OVP

SCP

UVP

PART NUMBER STRUCTURE

QAE60	-	72	S	05	U	-	P		HS
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Ctrl and Pin Options		Assembly Option
		36: 9~75 72: 14~160	S:Single	05:5 12:12 15:15 24:24 28:28 48:48 53:53	8:1 12:1		☐ :Negative logic, 0.150" pin length ☐ :Negative logic, 0.200" pin length ☐ :Positive logic, 0.150" pin length ☐ :Positive logic, 0.200" pin length		☐ : None HS :7G-0029B-F;H=0.24" HS1 :7G-0030B-F;H=0.5" HS2 :7G-0031B-F;H=0.24" HS3 :7G-0032B-F;H=0.5" TH :Through hole (No thread)* * The module can't equip Heat-sink with TH option.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	A	mA	%	μF
QAE60-36S05U	9 ~ 75	5	12	20	89	24000
QAE60-36S12U	9 ~ 75	12	5	20	89	4200
QAE60-36S15U	9 ~ 75	15	4	20	89	2700
QAE60-36S24U	9 ~ 75	24	2.5	20	90	1100
QAE60-36S28U	9 ~ 75	28	2.15	20	90	780
QAE60-36S48U	9 ~ 75	48	1.25	20	92	260
QAE60-36S53U	9 ~ 75	53	1.14	20	90	220
QAE60-72S05U	14 ~ 160	5	12	12	89	24000
QAE60-72S12U	14 ~ 160	12	5	15	89	4200
QAE60-72S15U	14 ~ 160	15	4	15	89	2700
QAE60-72S24U	14 ~ 160	24	2.5	12	90	1100
QAE60-72S28U	14 ~ 160	28	2.15	12	90	780
QAE60-72S48U	14 ~ 160	48	1.25	12	90	260
QAE60-72S53U	14 ~ 160	53	1.14	12	90	220

INPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	36Vin(nom) 72Vin(nom)		9 14	36 72	75 160	VDC
Start up voltage	36Vin(nom) 72Vin(nom)				9 14	VDC
Shutdown voltage	36Vin(nom) 72Vin(nom)		7.3 10	7.7 11	8.1 12	VDC
Start up time	Constant resistive load	Power up Remote ON/OFF		75 75	100 100	ms
Input Transient voltage	100 mS, max.	36Vin(nom) 72Vin(nom)	8.1 12			VDC
Input surge voltage	1 second, max.	36Vin(nom) 72Vin(nom)			100 185	VDC
Input filter ⁽¹⁾			Pi type			
Remote ON/OFF	Referred to -Vin pin	Negative logic (Standard) Positive logic (Option) Input current of Ctrl pin Remote off input current	DC-DC ON DC-DC OFF DC-DC ON DC-DC OFF	Short or 0 ~ 1.2VDC Open or 3 ~ 12VDC Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC		-0.5 3 1 mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.1		+0.1	%
Load regulation	No Load to Full Load	-0.1		+0.1	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense	-20		+10	%
Remote sense	% of Vout(nom). If remote sense is not being used, SENSE pins should be connected to corresponding polarity OUTPUT pins.			10	%
Ripple and noise	Measured by 20MHz bandwidth With a 1μF/25V X7R MLCC and a 22μF/25V POS-CAP 5Vout With a 22μF/25V X7R MLCC 12Vout, 15Vout With a 4.7μF/50V X7R MLCC 24Vout, 28Vout With a 2.2μF/100V X7R MLCC 48Vout, 53Vout		75 100 200 300		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		μs
Over voltage protection	% of Vout(nom); Hiccup mode	120		135	%
Over load protection	% of Iout rated; Hiccup mode	120		140	%
Short circuit protection					Continuous, automatic recovery

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute 72Vin(nom) Input to Output (Reinforced insulation) Input (Output) to Base-Plate 1 minute 36Vin(nom) Input to Output (Basic insulation) Input (Output) to Base-Plate	3000 1500 2250 1600			VAC VDC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1000	pF
Switching frequency			180		kHz
Safety approvals (Pending)				IEC/ UL/ EN60950-1 IEC/ UL/ EN62368-1	
Standard approvals (Pending)	Railway			EN50155 EN45545-2	
Case material				Aluminum base-plate with plastic case	
Potting material				Silicone (UL94 V-0)	
Weight				64g (2.26oz)	
MTBF	MIL-HDBK-217F, Full load			7.381 x 10 ⁵ hrs	

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating base-plate temperature	With derating	-40		+105	°C
Maximum case temperature				+105	°C
Over temperature protection			+110		°C
Storage temperature range		-55		+125	°C
Thermal impedance	DC-DC module Only mount on the iron base-plate Heat-sink type with 0.24" Height Heat-sink type with 0.5" Height		8.27 2.43 7.40 6.16		°C/W
Thermal shock				EN61373, MIL-STD-810F	
Vibration				EN61373, MIL-STD-810F	
Relative humidity				5% to 95% RH	

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55011, EN55032	With external components
ESD	EN61000-4-2	Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$
Radiated immunity	EN61000-4-3	20 V/m
Fast transient	EN61000-4-4	$\pm 2\text{kV}$
Surge	QAE60-36S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220 μF /100V)
	QAE60-72S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KXJ series, 150 μF /200V)
	EN61000-4-5	EN55024: $\pm 1\text{kV}$ and EN50155: $\pm 2\text{kV}$
Conducted immunity	QAE60-36S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KY series, 220 μF /100V)
	QAE60-72S□□U	With 2 pcs of aluminum electrolytic capacitor (Nippon Chemi-con KXJ series, 150 μF /200V)
	EN61000-4-6	10 Vr.m.s
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second

Note:


- Input source impedance: The power module will operate as specifications without external components, assuming that the source voltage has a very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage source has finite impedance, performance can be improved by adding external filter capacitor.
The QAE60-36S□□U recommended Nippon Chemi-con KY series, 220 μF /100V.
The QAE60-72S□□U recommended Nippon Chemi-con KXJ series, 150 μF /200V.
- BASE-PLATE GROUNDING: When connect two screw bolts to shield plane, the EMI could be reduced.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

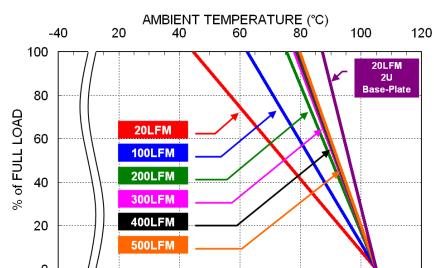


QAE60-72S05U Derating Curve
(See Thermal Considerations)

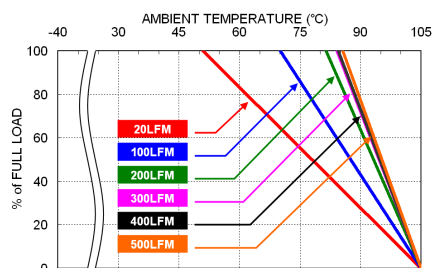


QAE60-72S05U Derating Curve
With 0.24" Height Heat-sink
(See Thermal Considerations)

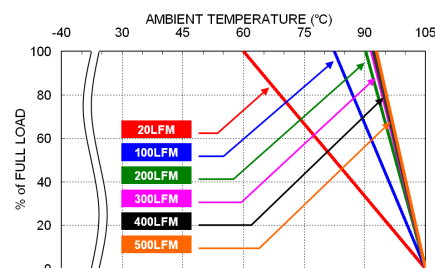

QAE60-72S05U Derating Curve
With 0.5" Height Heat-sink
(See Thermal Considerations)

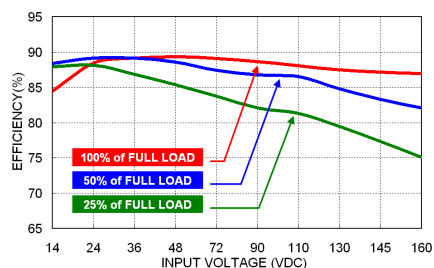

QAE60-72S05U Efficiency vs. Input Voltage

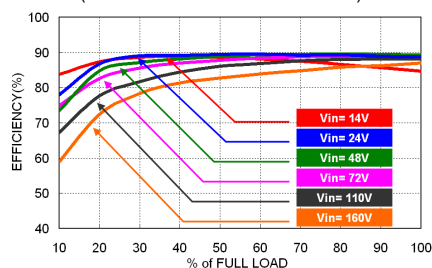

QAE60-72S05U Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
QAE60-36S□□U	12	Fast-Acting
QAE60-72S□□U	8	Fast-Acting

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

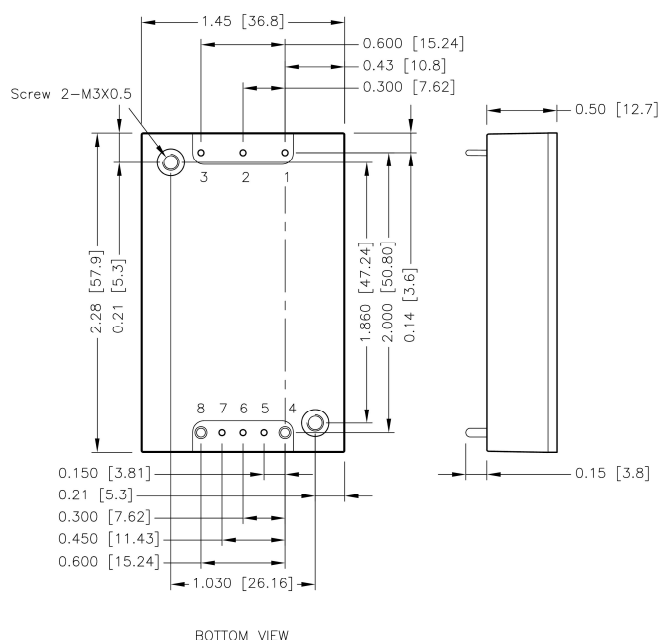


PIN CONNECTION

PIN	DEFINE	DIAMETER
1	- Vin	0.04 Inch
2	Ctrl	0.04 Inch
3	+ Vin	0.04 Inch
4	- Vout	0.06 Inch
5	- Sense	0.04 Inch
6	Trim	0.04 Inch
7	+ Sense	0.04 Inch
8	+ Vout	0.06 Inch

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]
4. The screw locked torque: MAX 3.5kgf-cm [0.34N-m]

RECOMMENDED PAD LAYOUT

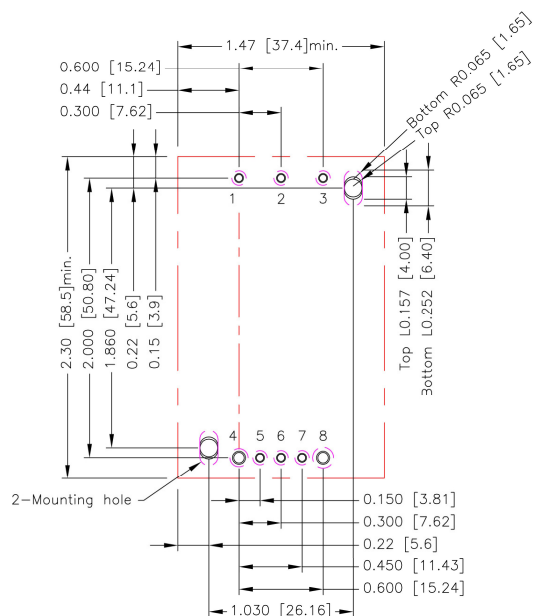

All dimensions in inch[mm]

Pad size(lead free recommended)

Through hole 1.2.3.5.6.7: $\varnothing 0.051[1.30]$

Through hole 4.8: $\varnothing 0.075[1.90]$

Through hole of mounting: $\varnothing 0.126[3.20]$

Top view pad 1.2.3.5.6.7: $\varnothing 0.064[1.63]$

Top view pad 4.8: $\varnothing 0.094[2.38]$

Top view pad of mounting:Groove R0.065[1.65]L0.157[4.00]

Bottom view pad 1.2.3.5.6.7: $\varnothing 0.102[2.60]$

Bottom view pad 8: $\varnothing 0.150[3.80]$

Bottom view pad 4: $\varnothing 0.130[3.30]$

Bottom view pad of mounting: Groove R0.065[1.65]L0.252[6.40]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this Temperature to a lower value for extremely high reliability.


- Thermal test condition with vertical direction by natural convection (20LFM).
- The iron base-plate dimension is 19" X 3.5" X 0.063" (The height is EIA standard 2U).
- The heat-sink is optional and P/N: 7G-0029B-F, 7G-0030B-F, 7G-0031B-F, 7G-0032B-F

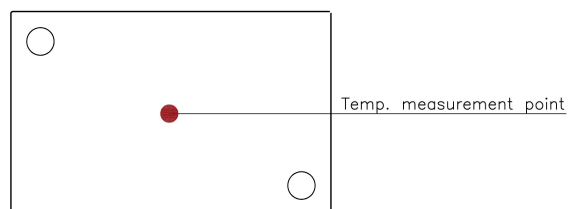


BASE PLATE

HEAT-SINK TYPE OPTIONS


QAE60-□□S□□U -HS
7G-0029B-F

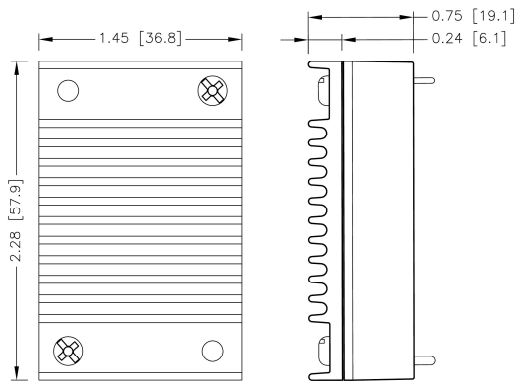


QAE60-□□S□□U -HS1
7G-0030B-F

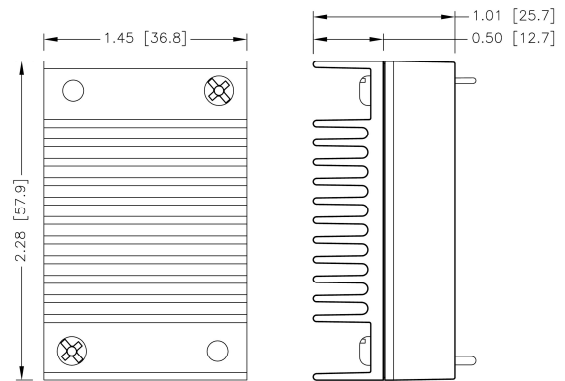

QAE60-□□S□□U -HS2
7G-0031B-F

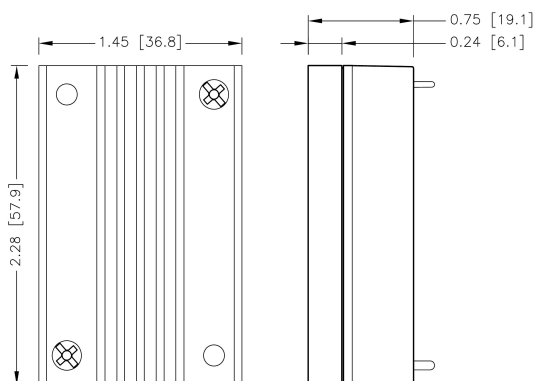

QAE60-□□S□□U -HS3
7G-0032B-F

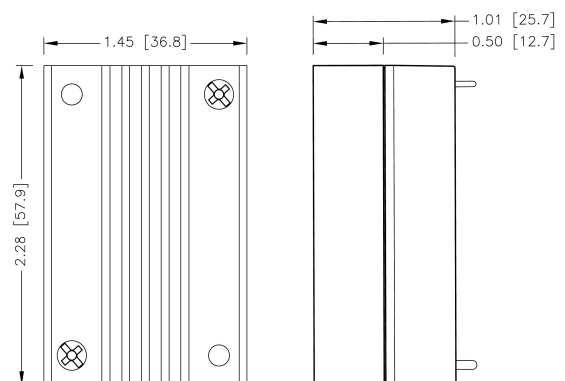

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]

OUTPUT VOLTAGE ADJUSTMENT

Output voltage is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting an external resistor between the Trim pin and either the +Sense or -Sense pins.

With an external resistor between the Trim and -Sense pin, the output voltage set point decreases.

With an external resistor between the Trim and +Sense pin, the output voltage set point increases.

Maximum output deviation is +10% inclusive of remote sense.

The external TRIM resistor needs to be at least 1/8W of rated power.

Trim Up Equation

$$R_U = \left(\frac{5.11V_{OUT}(100 + \Delta\%)}{1.225\Delta\%} - \frac{511 + 10.22\Delta\%}{\Delta\%} \right) k\Omega$$


Trim Down Equation

$$R_D = \left(\frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S05U

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.40	5.45	5.50
RU (kΩ)	1585.35	797.994	535.542	404.316	325.58	273.09	235.596	207.476	185.605	168.109

□□S12U

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
RU (kΩ)	4534.55	2287.19	1538.08	1163.52	938.78	788.956	681.939	601.676	539.25	489.309

□□S15U

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
RU (kΩ)	5798.49	2925.42	1967.73	1488.89	1201.58	1010.04	873.229	770.619	690.812	626.966

□□S24U

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
RU (kΩ)	9590.32	4840.11	3256.7	2465	1989.98	1673.3	1447.1	1277.45	1145.5	1039.94

□□S28U

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	28.28	28.56	28.84	29.12	29.40	29.68	29.96	30.24	30.52	30.80
RU (kΩ)	11275.58	5691.08	3829.58	2898.83	2340.38	1968.08	1702.151	1502.705	1347.58	1223.48

□□S48U


ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
RU (kΩ)	19701.9	9945.94	6693.96	5067.97	4092.38	3441.99	2977.42	2628.99	2357.99	2141.19

□□S53U

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	53.53	54.06	54.59	55.12	55.65	56.18	56.71	57.24	57.77	58.30
RU (kΩ)	21808.437	11009.651	7410.056	5610.259	4530.38	3810.461	3296.233	2910.562	2610.596	2370.623

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S□□U										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
RD (k Ω)	500.78	245.28	160.113	117.53	91.98	74.947	62.78	53.655	46.558	40.88
ΔV (%)	11	12	13	14	15	16	17	18	19	20
RD (k Ω)	36.235	32.363	29.088	26.28	23.847	21.718	19.839	18.169	16.675	15.33